

# LED Eco Exit Maintained Emergency Exit

**Catalogue No:**

F9920L/DS/E

**Description:**

LED Wall or Ceiling Mounted  
Emergency Exit Luminaire.

Fast Fit Bracket & Connector for Ease  
of Installation.

Extruded Aluminium Body with Slim  
Compact Styling

High Emergency Classification.

**Available Options:**

F9920L/DS/E Double Sided EXIT

F9920L/SS/E Single Sided EXIT

\* denotes:


/E 'EXIT' with Peel Off Arrows

/RMS Running Man Exit Straight

/RML Running Man Exit Arrow Left

/RMR Running Man Exit Arrow Right

Australian conceived,  
designed & manufactured.

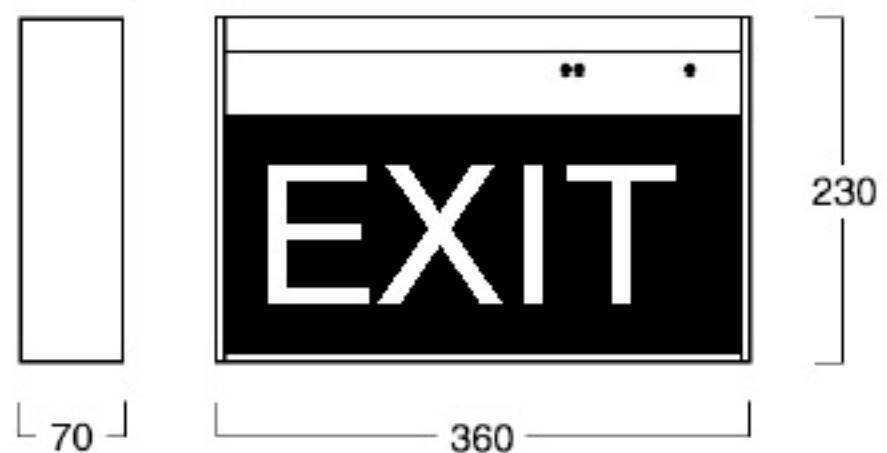

PHOTOMETRIC CLASSIFICATION			MAXIMUM PERMISSIBLE SPACING FOR EMERGENCY LUMINAIRES															
			MOUNTING HEIGHT - M															
			2.1	2.4	2.7	3.0	3.3	3.6	4.0	4.5	5	6	7	8	9	10	15	20
F9920L/SS	C0	D3.2	6.5	6.6	6.6	6.5	6.4	6.2	5.8	5.1	4.1							
	C90	E2	5.2	5.2	5.4	5.2	5.0	4.6	4.8	4.0								
F9920L/DS	C0	D3.2	6.5	6.6	6.6	6.5	6.4	6.2	5.8	5.1	4.1							
	C90	E2.5	5.6	5.8	5.8	6.0	5.8	5.8	5.2	5.2	4.6							

email: [info@famco.co.nz](mailto:info@famco.co.nz) fax: 0064 6 3538129

web: [famco.co.nz](http://famco.co.nz) phone 0800 4 FAMCO