

LED Goldstar™

SURFACE MOUNT – D50



A complete range of non-maintained Emergency luminaires for commercial applications.

FEATURES

- Electronics designed to lengthen the life of the battery, minimizing maintenance costs
- Environmentally friendly battery
- One high Brightness LED
- T-sense™ temperature sensing technology for LIION battery
- Available in black or white finish
- Standalone or MasterMinder emergency monitored
- 5 year warranty
- Designed and Manufactured in Australia


APPLICATIONS

- Commercial offices
- Shopping centre
- Facilities
- Public Building applications



F9993/SMS/LI

TECHNICAL INFORMATION

- Operating mode: Maintained
- Operating voltage: 240V a.c. +/- 6% 50Hz
- Power consumption: 1.5W
- Battery: Li-ion 6.4V, 1.5Ah
- IP rating: IP20
- Body construction: Polycarbonate (satellite head), steel (enclosure)
- Operating temperature: 10°C to 40°C
- Compliance: AS/NZS 2293 AS/NZS 60598 



SPU		
Cat No	Description	Classification C0/C90
F9993/SMS/LI	LED Goldstar Surface Mount White	D50
F9993/SMS/BL/LI	LED Goldstar Surface Mount Black	D50

MasterMinder		
Cat No	Description	Classification C0/C90
FX9993/SMS/LI	MasterMinder LED Goldstar Surface Mount White	D50
FX9993/SMSBL/LI	MasterMinder LED Goldstar Surface Mount Black	D50

LED Goldstar™

SURFACE MOUNT – D50

DIMENSIONS

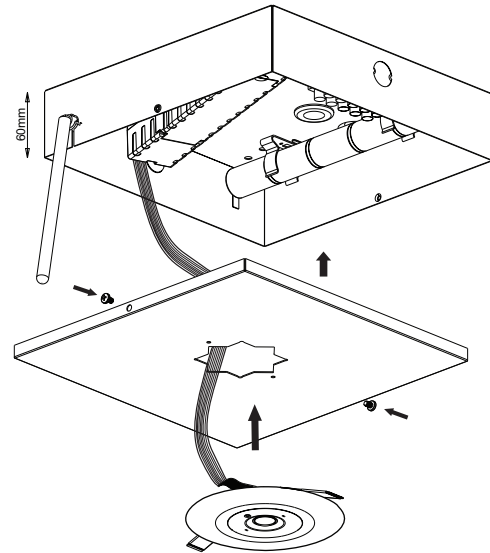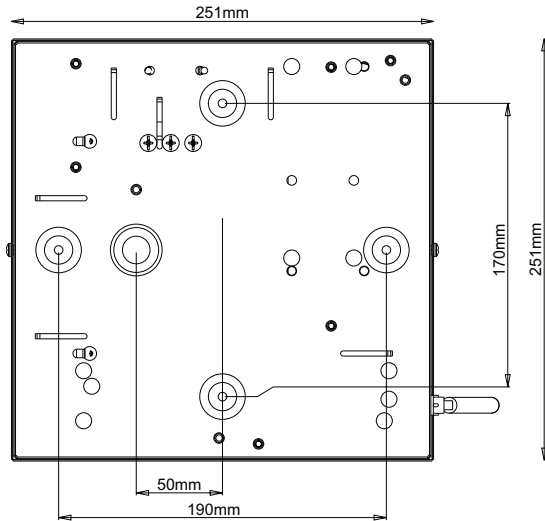

Spacing table: Maximum spacings between luminaires for 0.2 lux

Mounting Height (m)	2.4	2.7	3	3.3	3.6	4.0
A	18.7	19.4	20.1	20.7	21.2	21.8
B	18.7	19.4	20.1	20.7	21.2	21.8

Spacing table: Maximum spacings between luminaires for 1 lux

Mounting Height (m)	2.4	2.7	3	3.3	3.6	4.0
A	10.5	10.8	11	11.2	11.3	11.4
B	10.5	10.8	11	11.2	11.3	11.4

More info available at:
www.famco.com.au