LED Goldstar Maximus

EMERGENCY LIGHTING

FEATURES

Suitable for high ceilings and large areas

Energy efficient: less than 3.5W energy consumption in stand by mode (SPU)

One high Brightness LED

D100 emergency classification

SPU or FMX options


Several mounting options: surface, wall bracket, suspension rod or suspension wire

Available in Grey and Black finish

Compliant to AS2293

TECHNICAL INFORMATION

- Colour: Grey (F9990 & FX9990) or Black (F9990/BL & FX9990/BL)
- Type: SPU (F9990 & F9990/BL) or FMX (FX9990 & FX9990/BL)
- Light Source: LEDBattery: NiCd
- Operating voltage: 240V a.c. +/- 6% 50Hz
- Power Consumption: TBC (F9990 & F9990/BL) and TBC (FX9990 & FX9990/BL)
- Body Constructions: Polycarbonate
 Operating Temperature: 10°C to 40°C
 Lighting Classification: C0/C90 D100
- IP Rating: IP65IK Rating: IK07

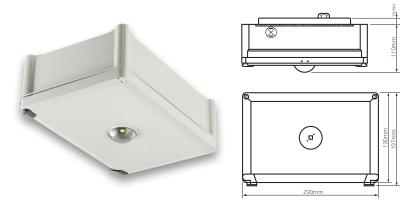

SPU		
Cat No.	Description	
F9990	LED Goldstar Maximus D100 IP65 Surface Mounting Grey	
F9990/BL	LED Goldstar Maximus D100 IP65 Surface Mounting Black	

FMX		
Cat No.	Description	
FX9990	FMX LED Goldstar Maximus D100 IP65 Surface Mounting Grey	
FX9990/BL	FMX LED Goldstar Maximus D100 IP65 Surface Mounting Black	

ACCESSORIES		
Cat No.	Description	
FROD/20/1200	Suspension Rod & Canopy 120mm Length Grey	
FROD/20/3000	Suspension Rod & Canopy 3000mm Length Grey	
FROD/20/1200B	Suspension Rod & Canopy 1200mm Length Black	
FROD/20/3000B	Suspension Rod & Canopy 3000mm Length Black	
F9990/SUSP	Suspension Wire Kit Grey	
F9990/SUSPB	Suspension Wire Kit Black	
F9990/WBKT	Wall Bracket Grey	
F9990/WBKTB	Wall Bracket Black	

More info available at: www.famco.com.au

