

Mirage Exit Recessed 1 x 8W T5 Maintained FMX



Catalogue No:
FMX9917


Description:
1 x 8W T5 Ceiling Recessed
Emergency Exit Luminaire.
Edge-Lit Solid Acrylic Diffuser with
Recessed Metal Body
Famco MasterMinder Computer
Monitoring and Control System

Available Options:
FMX9917/SS/* Single Sided
FMX9917/DS/* Double Sided

* denotes:
/RMS Running Man Exit Straight
/RML Running Man Exit Arrow Left
/RMR Running Man Exit Arrow Right

Australian conceived,
designed & manufactured.

www.famco.com.au

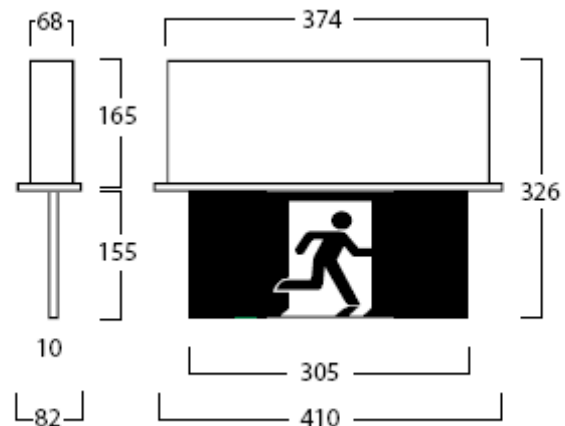

PHOTOMETRIC CLASSIFICATION			MAXIMUM PERMISSIBLE SPACING FOR EMERGENCY LUMINAIRES															
			MOUNTING HEIGHT - M															
			2.1	2.4	2.7	3.0	3.3	3.6	4.0	4.5	5	6	7	8	9	10	15	20
F9917/SS	C0	D6.3	8.6	8.8	9.0	9.1	9.2	9.2	9.2	9.0	8.7	7.7	5.7					
	C90	C10	7.3	7.7	8.0	8.3	8.6	8.8	9.0	9.1	9.2	9.1	8.6	7.5	5.6			
F9917/DS	C0	D5	7.8	8.0	8.1	8.2	8.2	8.2	8.0	7.7	7.3	5.7	1.6					
	C90	C10	7.3	7.7	8.0	8.3	8.6	8.8	9.0	9.1	9.2	9.1	8.6	7.5	5.6			

FAMCO LIGHTING PTY LTD
ACN 091 160 440 ABN 22 091 160 440
100 Rupert St, Collingwood 3066
(Melbourne), Victoria, Australia

T: (03) 9935 7300
F: (03) 9935 7301
E: info@famco.com.au

Correspondence:
P.O. Box 108,
Abbotsford VIC 3067

© 2008 Famco Lighting Pty Ltd All rights reserved.
E&OE. Subject to change without notice. to allow progress in design. This document and the information it contains is the property and copyright of Famco Lighting Pty Ltd and must not be used, copied, transmitted or reproduced without our written permission.